


PJM Item Tag PJM Stack Tag

SRF 66V10IT
SRF 66V10ST

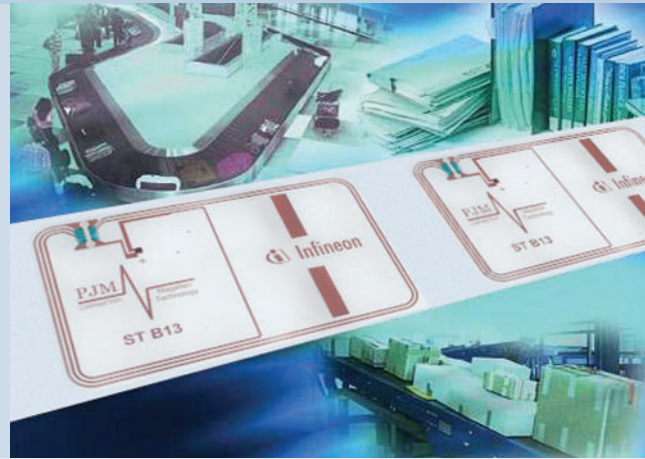

PJM (Phase Jitter Modulation) Contactless Memory for High Speed and Zero Separation Applications

I N T E L L I G E N T 10 KBit EEPROM with contactless interface
 PJM IT (Item Tag): complying to ISO/IEC 18000-3 Mode 2
 PJM ST (Stack Tag): an enhancement of ISO/IEC 18000-3 Mode 2
 PJM IT and PJM ST: Transaction speed is approximately 25 times faster than typical RFID devices.
 PJM ST: Inherent Zero Separation feature supports read/write to hundreds of closely stacked items.

P J M - A **B R E A K T H R O U G H** technology, a solution to current and new avenues of RFID application.

Application Segments

- Track and Trace
- Authentication
- Product/SCM
- Operation Management

Application Examples

- Document Management
- Pharmaceutical
- Gaming
- Postal services
- Electronic manufacturing
- Airline baggage handling
- Textile industry

Features

- Operating frequency 13.56 MHz
- Contactless air interface and anticollision complying with ISO 18000 Part 3 Mode 2
 - Data transfer rate (to tag): 424 kbit/s
 - Data transfer rate (from tag): 106 kbit/s
 - Identification up to 1200 tags/s
 - Simultaneous tag responses up to 8 channels
- High transfer rate for Item Tag and Stack Tag
 - Data transfer rate up to 848 kbit/s
- Zero Separation for Stack Tag
 - Read/write of hundreds closely stacked items
- 48 bit password
- Lockable chip memory
- Application Group identifier
- Conditional identifier
- 10 KBit EEPROM
- Block organization of memory
- EEPROM updating time per block < 5 ms
- Endurance > 100,000 erase/write cycles
- Data retention > 10 years
- Ambient temperature: -25 ... +70°C (for IC)


www.infineon.com/contactless

Chip Card & Security ICs



Never stop thinking


Block Diagram

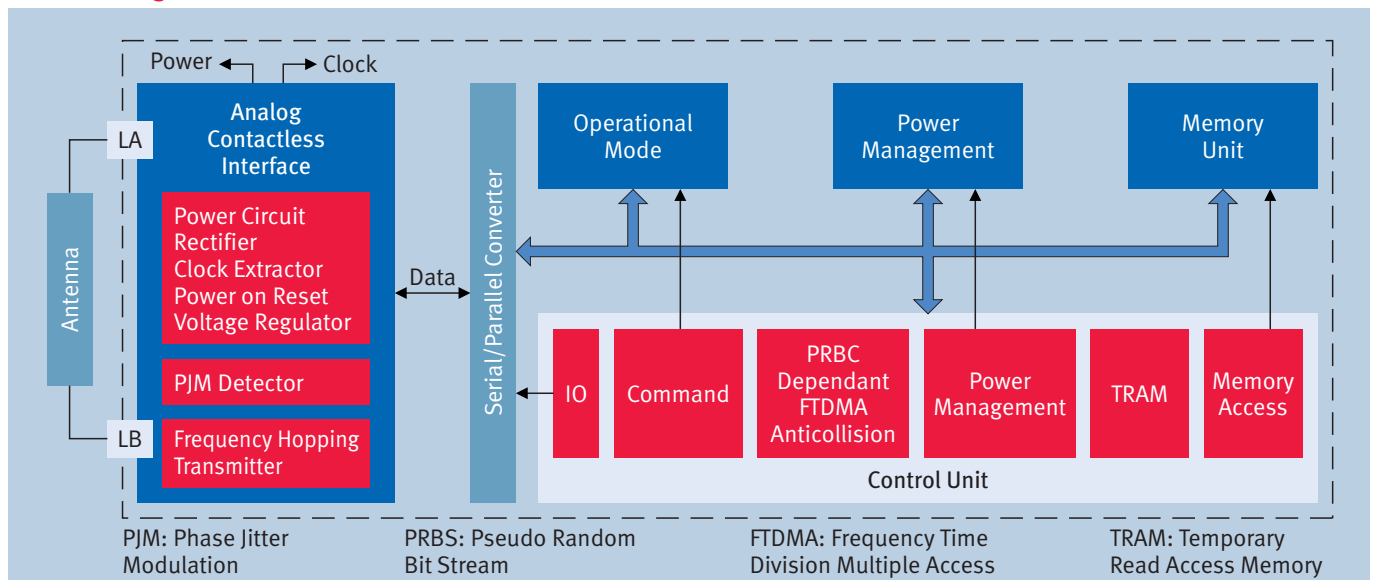

Product Summary

Type	Sales Code	Package
SRF 66V10IT	on request	die, inlay, module
SRF 66V10ST	on request	die, inlay, module

Application Example

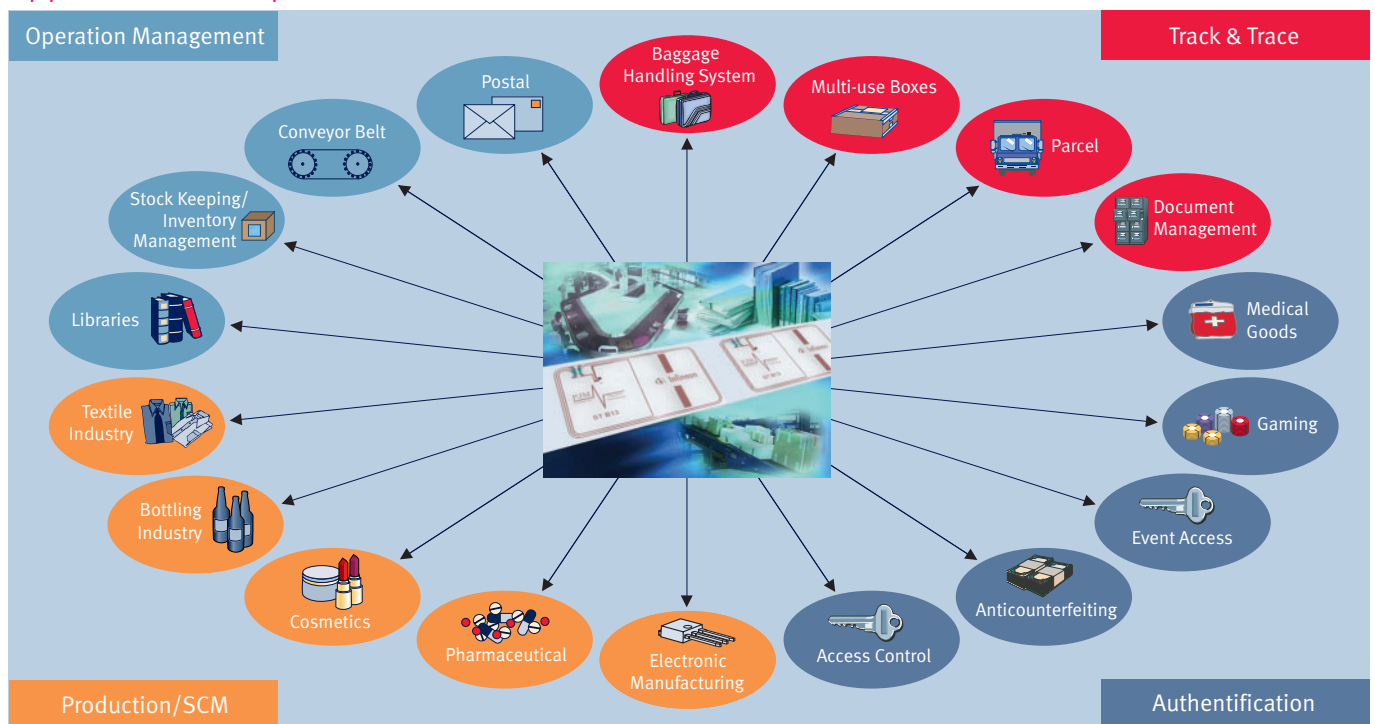

For further information, please contact:

Infinion Technologies AG, Call and Support Center, Tel: +49 89 234 80000, e-mail: security.chipcard.ics@infineon.com

How to reach us:
<http://www.infineon.com>

Published by
 Infineon Technologies AG
 81726 München, Germany

© Infineon Technologies AG 2006.
 All Rights Reserved.

Legal Disclaimer

The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Ordering No. B116-H8814-X-X-7400
 Printed in Germany
 PS 02061. nb